


8. Disconnect the positive + terminal from the battery.
9. Remove the battery taking care not to drop the terminal nuts.

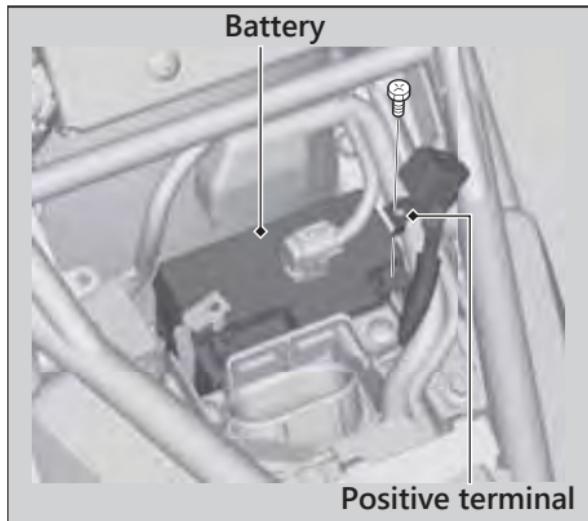

I Installation

Install the parts in the reverse order of removal. Always connect the positive + terminal first. Make sure that bolts and nuts are tight.

Make sure the clock information is correct after the battery is reconnected. [2 P. 26](#)

For proper handling of the battery, see "Maintenance Fundamentals." [2 P. 53](#)

"Battery Goes Dead." [2 P. 107](#)