


Tool Box

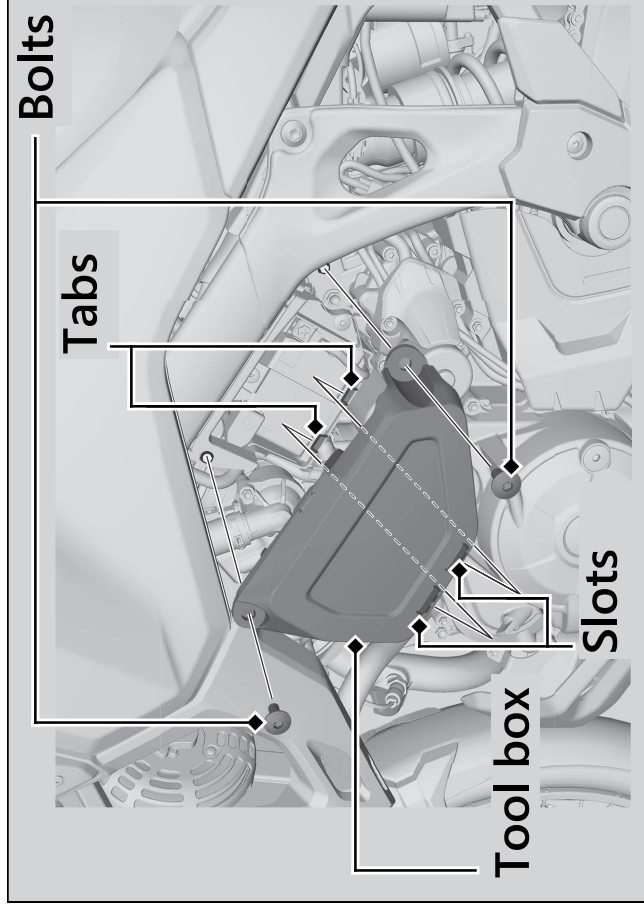

■ Removal

1. Remove the bolts using the hex wrench provided on the underside of the rear seat. ➡ P. 222
2. Remove the tool box by releasing its slots from the tabs.

■ Installation

Install the parts in the reverse order of removal.