


5. Disconnect the negative $\ominus$ terminal from the battery.
6. Disconnect the positive $\oplus$ terminal from the battery.
7. Remove the battery taking care not to drop the terminal nuts.

Positive terminal **Negative terminal**

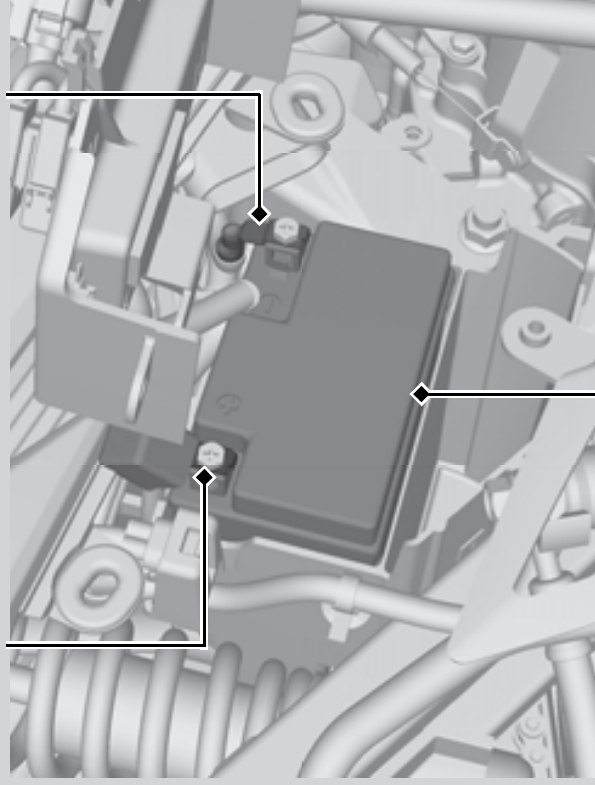

Installation

Install the parts in the reverse order of removal. Always connect the positive $\oplus$ terminal first. Make sure that bolts and nuts are tight.

For proper handling of the battery, see "Maintenance Fundamentals." ➔ P. 37
"Battery Goes Dead." ➔ P. 87